DSC-H1

SONY

LEVEL 2

SERVICE MANUAL

Ver. 1.4 2006. 06

DSC-H1

US Model
Canadian Model
AEP Model
UK Model
E Model
Hong Kong Model
Australian Model
Chinese Model
Japanese Model
Korea Model
Tourist Model

SUPPLEMENT-2

File this supplement-2 with the service manual.
(DI06-017)

- Change of schematic diagrams
- Change of repair parts list

4. PRINTED WIRING BOARDS AND SCHEMATIC DIAGRAMS

4-2. SCHEMATIC DIAGRAMS

: Changed portion

Page	Before change	After change
4-12	**SW-447 BOARD (1/2) (Location: C-4)** RB451 2200X4 D452 MAZW068H0LS0 3 2 1 1 S460	RB451 2200X4 D452 XX 3 2 1 1 S460

Sony EMCS Co.

2006F1600-1
©2006.06
Published by Kohda TEC

: Changed portion

Page	Before change	After change
4-13	**SW-447 BOARD (2/2) (Location: C-1)** 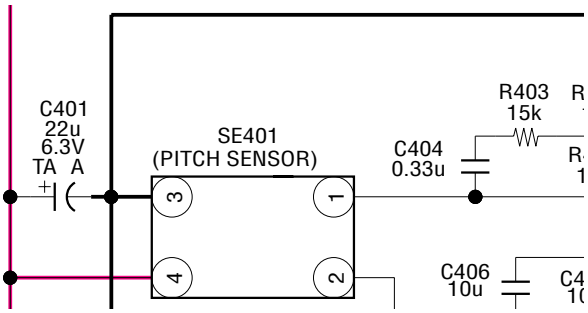	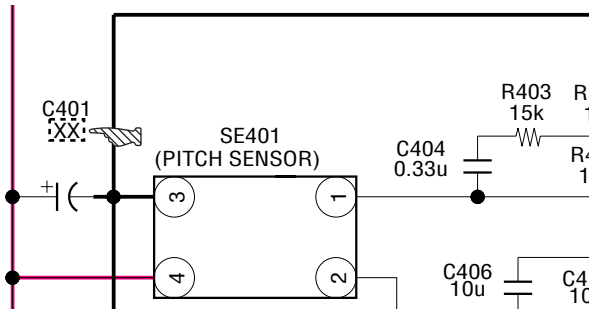
4-14	**SW-447 BOARD (2/2) (Location: B-6)** 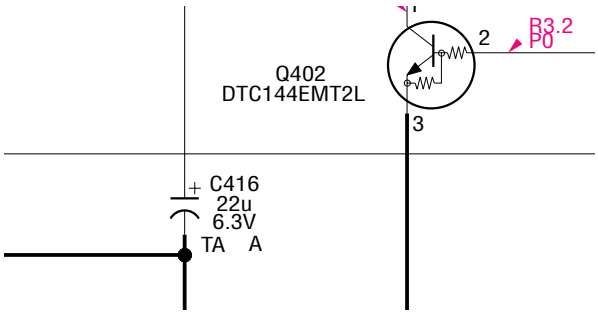	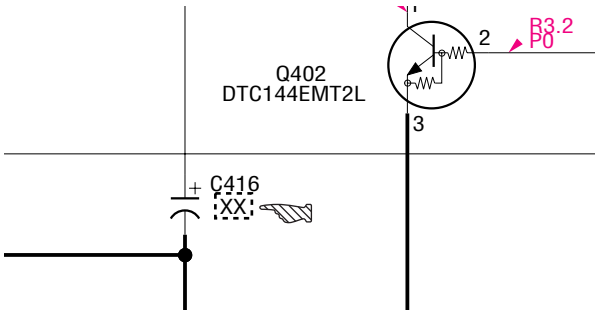

5. REPAIR PARTS LIST

5-1. EXPLODED VIEWS

: Changed portion : Added portion

Page	Before change	After change
5-5	**5-1-3. MAIN SECTION** 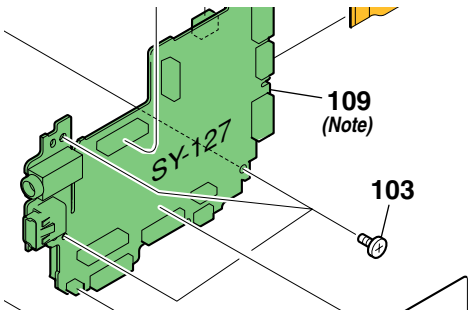 Ref. No. Part No. Description ⚠BT251 1-756-539-21 BATTERY, LITHIUM SECONDARY — — —	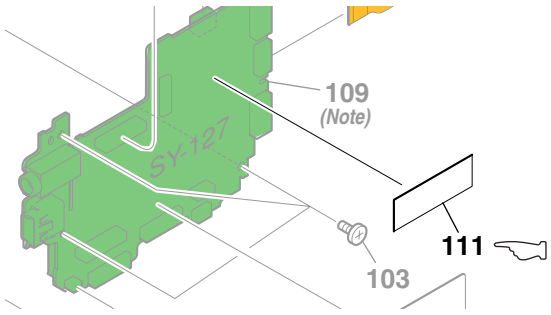 Ref. No. Part No. Description ⚠BT251 1-528-999-61 BATTERY, LITHIUM SECONDARY 111 2-588-056-01 SHEET (L) (760), MS PROTECTION

: Changed portion : Added portion

Page	Before change	After change
5-7	**5-1-5. LENS SECTION** 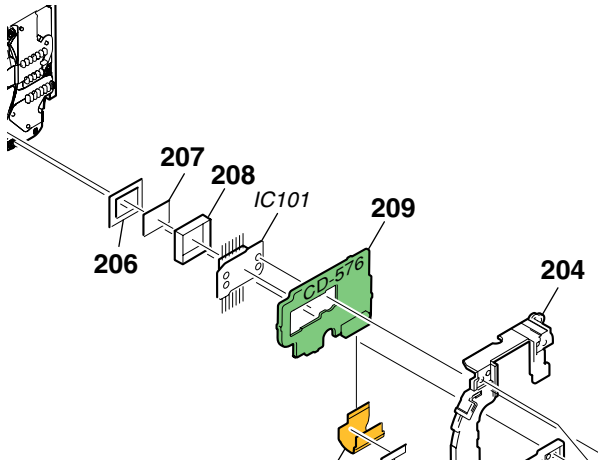	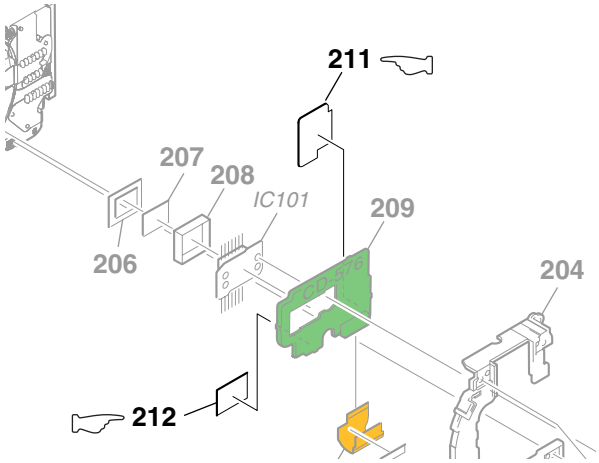 211 2-636-641-01 SHEET (MA), RADIATION 212 2-636-765-01 SHEET (CD), INSULATOR
5-8	**5-1-6. CABINET (FRONT) SECTION** 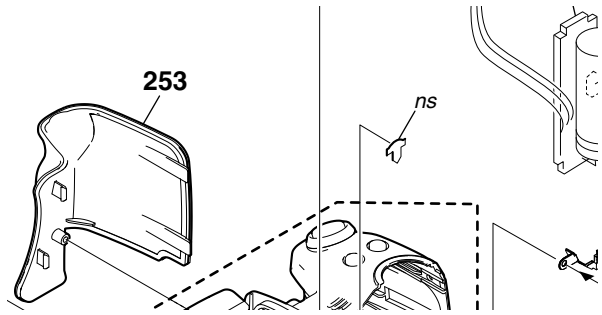	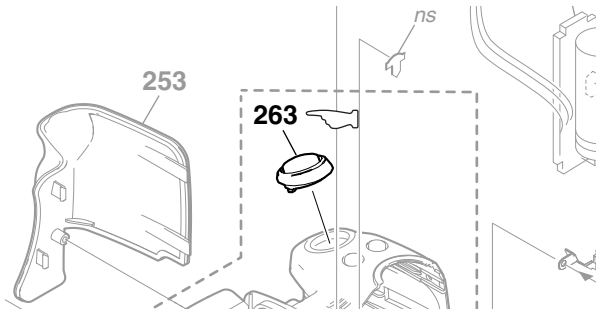
	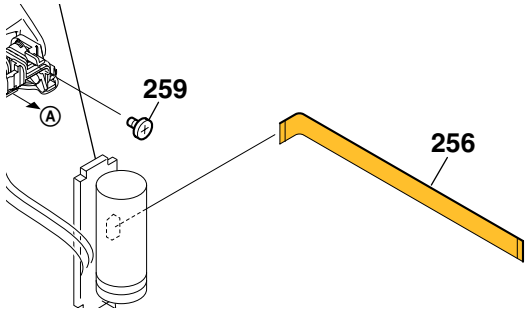 Ref. No. Part No. Description 253 2-629-815-01 GRIP	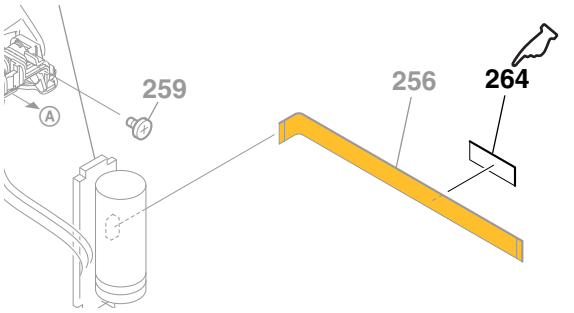 Ref. No. Part No. Description 253 2-629-815-02 GRIP 263 X-2149-056-1 RELEASE ASSY (SERVICE USE) 264 2-639-956-01 TAPE, PROTECTION
5-9	**5-1-7. ST SECTION** 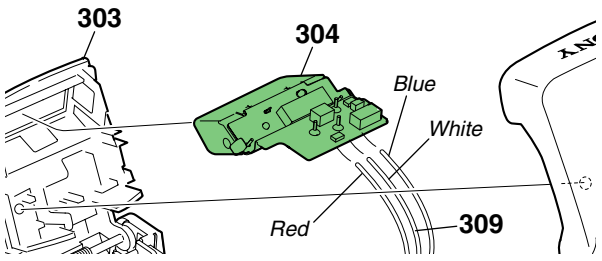	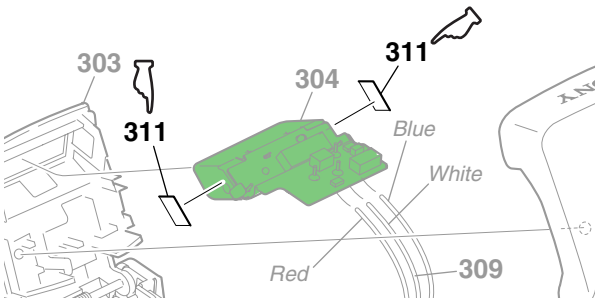 * 311 2-672-605-01 JY SHEET

DSC-H1_L2

5-2. ELECTRICAL PARTS LIST

: Changed portion : Added portion : Deleted portion

Page	Before change						After change					
5-11	**MS-275 BOARD**											
	Ref. No.	Part No.	Description				Ref. No.	Part No.	Description			
	⚠BT251	1-756-539-21	BATTERY, LITHIUM SECONDARY				⚠BT251	1-528-999-61	BATTERY, LITHIUM SECONDARY			
	CN251	1-816-644-31	FFC/FPC CONNECTOR (LIF) 12P				* CN251	1-816-644-51	FFC/FPC CONNECTOR (LIF) 12P			
5-12	**ST-123 BOARD**											
	CN001	1-816-644-31	FFC/FPC CONNECTOR (LIF) 12P				* CN001	1-816-644-51	FFC/FPC CONNECTOR (LIF) 12P			
	SW-447 BOARD											
	C401	1-119-750-11	TANTAL. CHIP	22uF	20%	6.3V	—	—	—			
	C416	1-119-750-11	TANTAL. CHIP	22uF	20%	6.3V	—	—	—			
	CN451	1-818-046-11	FFC/CONNECTOR, FPC (LIF (NON-ZIF)) 20P				CN451	1-818-046-51	FFC/CONNECTOR, FPC (LIF (NON-ZIF)) 20P			
	D452	6-500-776-01	DIODE MAZW068H0LS0				—	—	—			
	L401	1-469-757-21	INDUCTOR	10uH			L401	1-400-588-11	INDUCTOR	10uH		